

VCW SERIES

First-In First-Out Chip Warmers







SPECIFIER STATEMENT

First-in, first-out high volume chip warmer Vulcan Model Nos. VCW26 and VCW46. VCW26 holds 26 gallons of chips while model VCW46 holds 46 gallons of chips. Internal baffles to minimize chip breakage. Fan circulates air for even heat distribution and quick heating of the chips. Fully removable front panel and bottom baffle allows for full access to the interior of the unit for quick and easy cleaning. Top doors, front panel and bottom baffle are removable without tools. Top filled doors open wide for easy loading of chips. Front door serves as a shelf when scooping chips and the sloped front allows secure closure and easy opening. Unit comes with illuminated on/off switch and adjustable rear-mounted thermostat (90°-190°F). Durable 20 gauge stainless steel construction with 12 gauge front door hinge and high density insulation. Furnished with power cord and a NEMA 5-15 plug, 120 volt, 1,000 watts / 8.3 apms (VCW26) 1,500 watts / 12.5 amps (VCW46). One year limited parts and labor warranty. After the first year, lifetime parts warranty on the heating elements and drawer rollers.

Exterior Dimensions:

VCW26: 26¹/₂"W x 30¹/₂"D x 30¹/₂"H **VCW46:** 26¹/₂"W x 30¹/₂"D x 38"H

UL Listed. UL Listed to Canadian safety standards, Classified by UL to NSF Standard #4.

| Project | | |
|---------|----------|-----------------------|
| AIA # | SIS # | |
| Item # | Quantity | C.S.I. Section 114000 |

MODELS

| VCW26 | 26 gallon chip warmer |
|-------|-----------------------|
| VCW46 | 46 gallon chip warmer |

STANDARD FEATURES

- Capacity 26 gallons for model VCW26 and 46 gallons for model VCW46
- Door opens creating a shelf for scooping chips
- Sloping front of unit allows secure closure and easy opening
- Wide top opening doors for easy loading of chips
- Fan circulates air for quick and even heating of chips
- Internal baffle minimizes chip breakage
- Fully removable front panel and bottom baffle for quick and easy cleaning of the unit
- Top doors, front panel and bottom baffle are removable without tools
- Durable 20-gauge stainless steel construction with high density insulation
- 12-gauge front door hinge
- Adjustable rear-mounted thermostat (90°-190°F)
- Illuminated on/off switch
- 4"-5" adjustable legs
- Furnished with power cord and a NEMA 5-15 plug
- VCW26: 120 volt / 1,000 watts / 8.3 amps
 VCW46: 120 volt / 1,500 watts / 12.5 amps
- One-year parts and labor warranty Ten-year element warranty


Approved by_

_____ Approved by

Date

Date



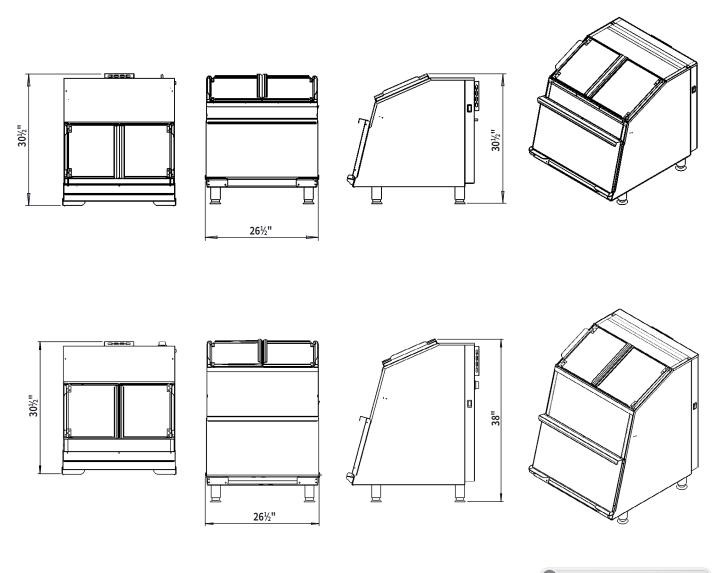

CAD and/or Revit Files Available

INSTALLATION MANUAL

This appliance is manufactured for commercial use only and is not intended for home use.

| | | Dimensions | | Shipping | Electrical | | | |
|-------|------------|------------|------|----------|------------|-------|-------|------|
| Model | Capacity | High | Deep | Wide | Weight | Volts | Watts | Amps |
| VCW26 | 26 gallons | 30½" | 30½" | 26½" | 115 lbs. | 120 | 1000 | 8.3 |
| VCW46 | 46 gallons | 38" | 30½" | 26½" | 153 lbs. | 120 | 1500 | 12.5 |

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.